



**Typical Applications** 

Potable water safe, the new SWP-4000 Submersable Pump combines the quality you expect from a Remco product with the unique versatility of a fully submersable pump. Built for rugged conditions, the SWP-4000 is able to pump 1.25 GPM from a depth of 230 feet! Remco also offers a variety of Easy Connect fittings and filters.



Corrosion resistant stainless steel construction



Built-in stainless steel mesh screen



Compact - fits 4" Bore



Potable Water Safe



Easy connect dual fitting

### **PUMP**

**Type** Submersible diaphragm pump.

### **Max Pressure**

230 Ft / 70 Meters

#### **Outlet Port**

Dual-Size Stainless Steel Outlet Nipple Fits ½" Hose Barb Tubing (0.50 Inch ID) or ½" Poly Pipe (0.62 Inch ID)

### Weight

10.0 lbs

### **MOTOR**

#### Leads

18 AWG, 36 in. long. Protected from Moisture Intrusion by double-0-ring seals and antiwicking lead bases

## Voltage

12VDC, 24VDC, 30VDC, 115VAC

#### **Power Requirements**

Designed to Operate from Any 12-30 VDC Power Source, Including 72 Cell Series Arrays, 60 or 72 Cell Modules or 12 or 24VDC Battery Banks

#### **Duty Cycle**

Continuous




# **SWP-4000 PERFORMANCE**

SWP-4000		12VDC			24VDC			30VDC		
FT. HEAD	PSI	GPM	LPM	AMPS	GPM	LPM	AMPS	GPM	LPM	AMPS
20	9	0.62	2.35	1.3	1.35	5.11	1.3	1.70	6.44	1.40
40	17	0.60	2.27	1.6	1.32	5.00	1.6	1.65	6.25	1.70
60	26	0.58	2.20	1.8	1.28	4.84	1.8	1.60	6.06	1.90
80	35	0.57	2.15	2.0	1.25	4.73	2.0	1.55	5.87	2.10
100	43	0.56	2.12	2.3	1.22	4.62	2.3	1.50	5.68	2.40
120	52	0.53	2.00	2.5	1.20	4.54	2.5	1.48	5.60	2.60
140	61	0.52	1.97	2.6	1.15	4.35	2.6	1.42	5.37	2.80
160	69	0.51	1.93	2.8	1.12	4.24	2.8	1.40	5.30	3.00
180	78	0.49	1.85	3.1	1.08	4.09	3.1	1.35	5.11	3.20
200	87	0.48	1.82	3.3	1.06	4.01	3.3	1.30	4.92	3.40
230	100	0.43	1.63	3.5	1.00	3.79	3.5	1.25	4.73	3.70

# **DEEP WELL SWP-4000 SERIES**





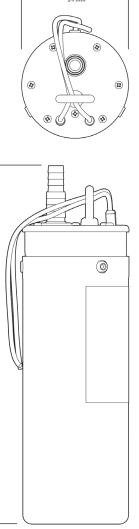

12.25 in 311.2 mm